

Hand programming of the GEO84ZM Alphanumeric pager

1.




Up Key

Down Key

Function Key

Read Key

2.

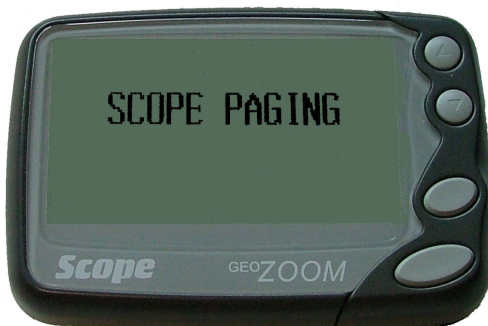

Insert a battery – the pager will emit two short beeps. Press & hold the 'Read' key to switch the pager on. As soon as the pager displays the start-up message, press both the 'Read' & 'Function' keys. NB – if the pager model is 'GEO84ZM V7R' you must first release the 'Read' key & then immediately press both the 'Read' & 'Function' keys.

3.




The password login screen should now be displayed. The default password is '7276'. Change each digit in turn by using the 'Up' or 'Down' keys. Confirm each correct digit and move on to the next by pressing the 'Read' key.

Directors Mr M Walton

Bleeper Services Ltd. Registered in England 4300959. Vat Reg. GB 789 7083 60
18 The Arkwright Suite, Coppull Mill, Mill Lane, COPPULL, Lancashire. PR7 5BW

Tel: 01257 794333 Fax: 01257 794777 www.universalradiohire.co.uk E-mail: mark@bleeperltd.co.uk

4.

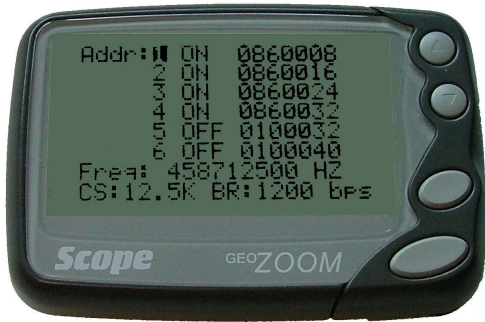

The coding screen displays:

The individual address numbers 1 to 6, the address enable state, On or Off & the 7-digit address ID or RIC. These are followed by Freq: (RF frequency in Hz), CS: (channel spacing in Khz) and BR: (baud rate in Hz). To modify these settings, move the cursor between address numbers by use of the 'Up' & 'Down' keys and to the right through each line

using the 'Read' key. Once highlighted, alter each option or digit as necessary using the 'Up' or 'Down' keys. Confirm each selection using the 'Read' key. The cursor will then move to the next field. As the end of each line is reached the cursor will move to the start of the next. When you are happy with the settings, press the 'Function' key to confirm the changes.

5.



Now save or discard your changes by selecting 'Yes' or 'No' using the 'Up' or 'Down' keys. Confirm your choice by pressing the 'Read' key.

NB: Pressing the 'Function' key at this point will discard all changes & switch the pager off.

6.



After saving the changes, the pager will emit 2 short beeps and switch off. You may now repeat steps 2 – 4 to confirm or further modify the settings.

Directors Mr M Walton

Bleper Services Ltd. Registered in England 4300959. Vat Reg. GB 789 7083 60
18 The Arkwright Suite, Coppull Mill, Mill Lane, COPPULL, Lancashire. PR7 5BW

Tel: 01257 794333 Fax: 01257 794777 www.universalradiohire.co.uk E-mail: mark@bleperltd.co.uk